


600mm x 1000mm Server Cabinet

C
A
B
I
N
E
T



Cabinet Features

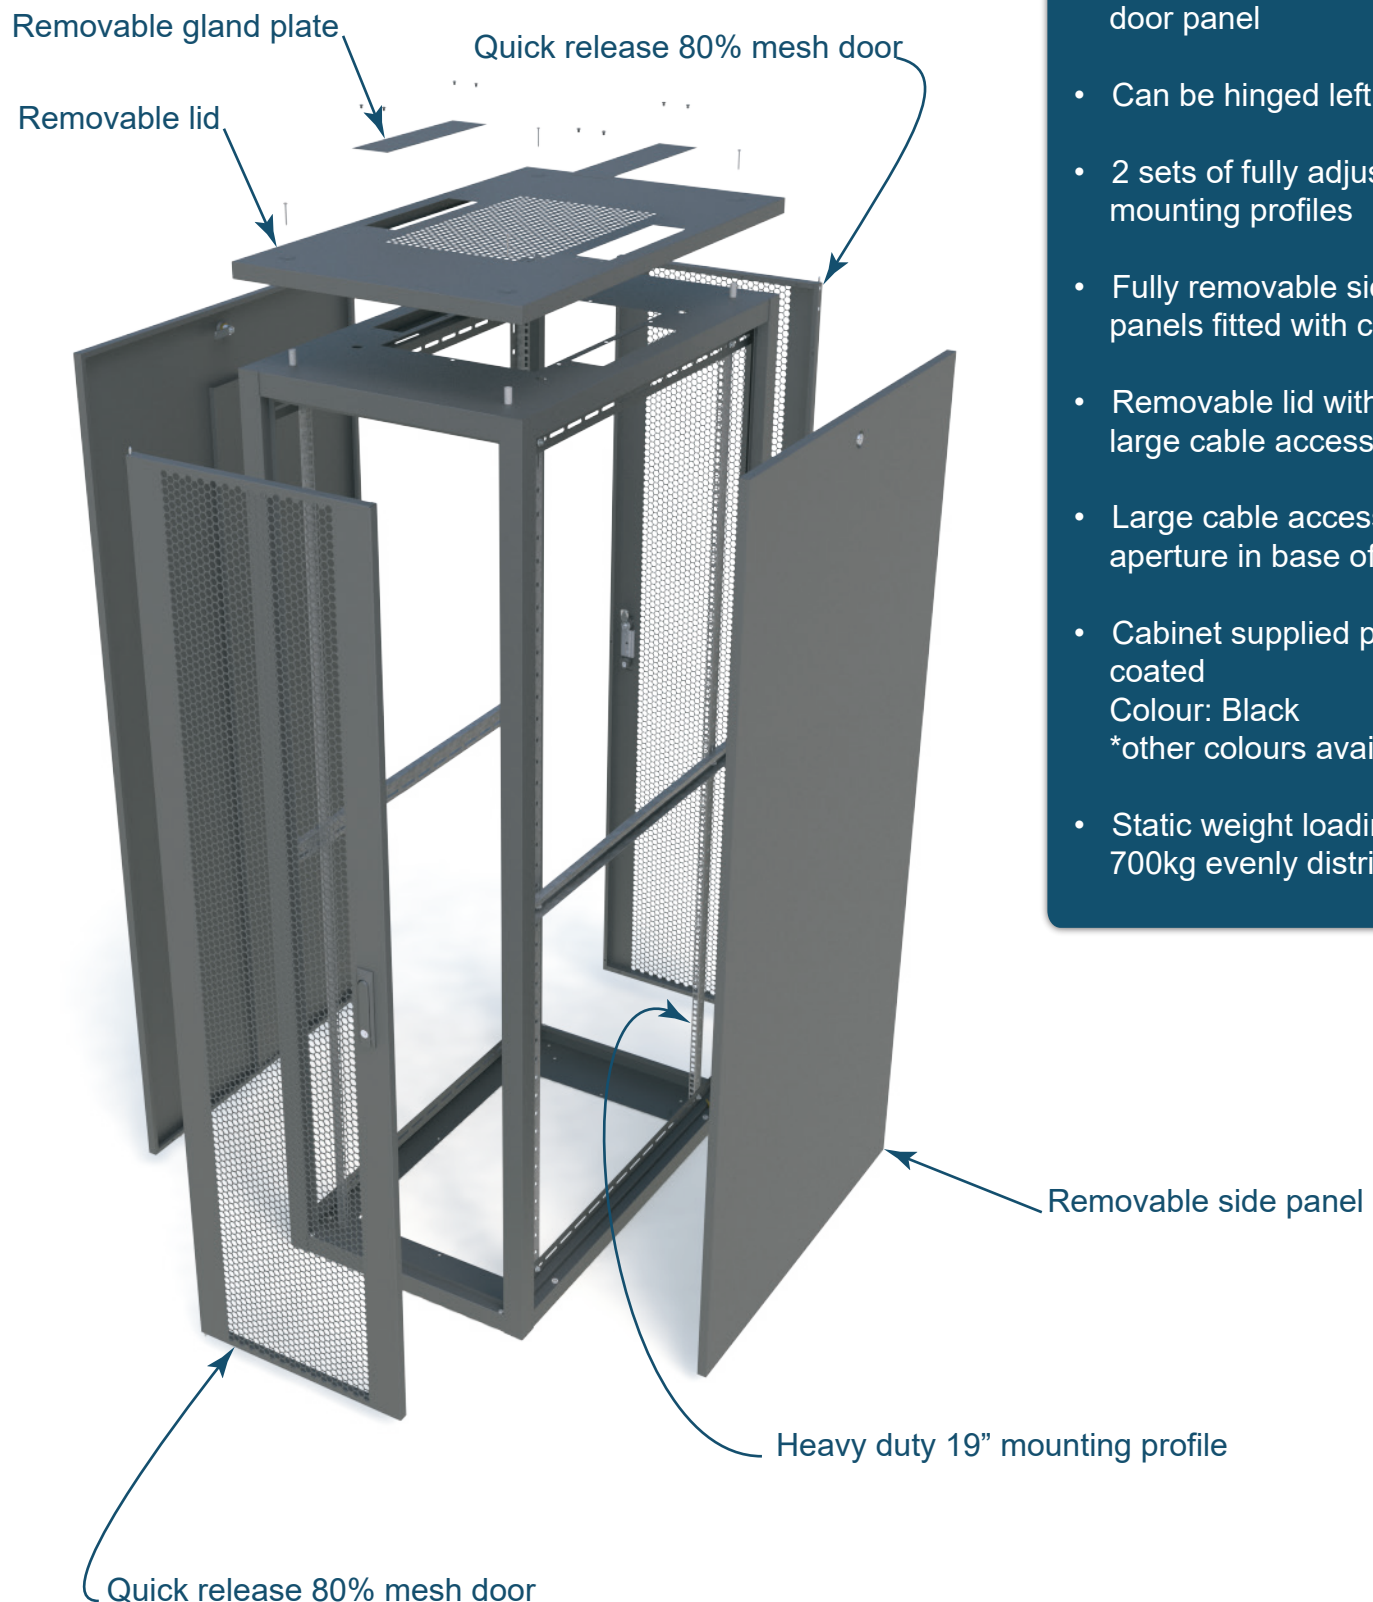

- Supplied fully assembled on a pallet
- Quick release 80% mesh door panel
- Can be hinged left or right
- 2 sets of fully adjustable 19" mounting profiles
- Fully removable side panels fitted with cam lock
- Removable lid with two large cable access positions
- Large cable access aperture in base of cabinet
- Cabinet supplied power coated
Colour: Black
other colours available
- Static weight loading of 700kg evenly distributed

Conforms to the following standards:

IEC 60297-3
DIN 41494-7
EIA 310-D
BS 3192

Cabinet Specifications

Width: 603mm

Depth: 1003mm

add 100mm to height if using plinth



47U 600 x 1000
Height: 2237mm



45U 600 x 1000
Height: 2148mm



42U 600 x 1000
Height: 2015mm



39U 600 x 1000
Height: 1881mm



36U 600 x 1000
Height: 1748mm



32U 600 x 1000
Height: 1570mm



27U 600 x 1000
Height: 1348mm



24U 600 x 1000
Height: 1214mm



21U 600 x 1000
Height: 1081mm



18U 600 x 1000
Height: 948mm



15U 600 x 1000
Height: 815mm



12U 600 x 1000
Height: 681mm

other sizes available upon request

Conforms to the following standards:

IEC 60297-3
DIN 41494-7
EIA 310-D
BS 3192




Sarll Metal Products Ltd

Accessories

Fixed shelf 19" 720 & 820 deep

available in 2 options

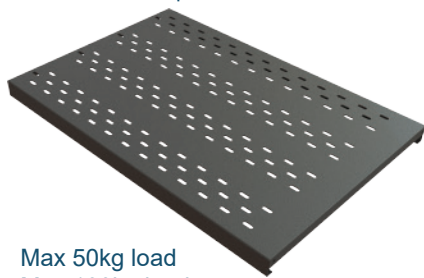

Max 50kg load
Max 100kg load

Telescopic shelves


available in 2 options



19" 720 deep
19" 820 deep

Plinth


600mm Wide x 1000mm Depth x 100mm Tall

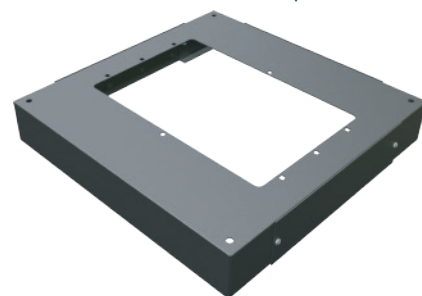

Cable tray

available in 2 widths

150mm Wide
300mm Wide

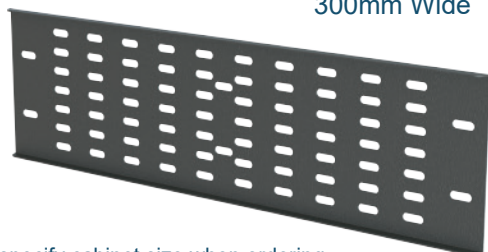


please specify cabinet size when ordering

Roof mounted fan tray


available in 2 options

2 way
4 way

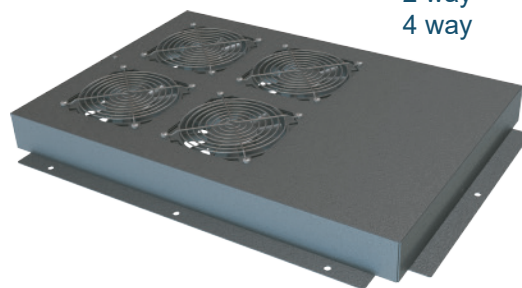

Modem shelves

available in 4 options

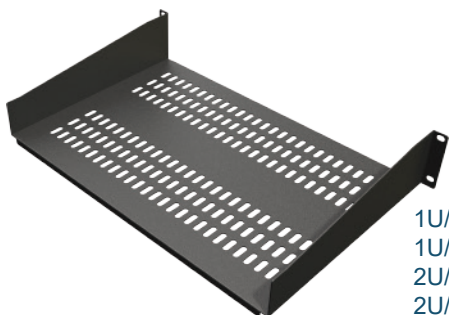

1U/190
1U/300
2U/300
2U/400

19" Power Distribution Unit



Horizontally mounted PDU

19" 4 way
19" 6 way


Vertically Mounted PDU

8 way
10 way
12 way

19" 6 way shown only

Blanking panels

available in 4 options

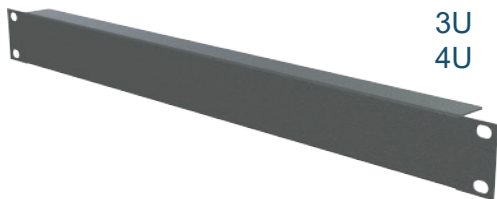

1U
2U
3U
4U

Earthing kit



Cage nut kit



Castors

Medium Duty 300kg
Heavy Duty 600kg



Adjustable foot



Conforms to the following standards:

IEC 60297-3
DIN 41494-7
EIA 310-D
BS 3192