


780mm x 780mm Cabinet



C
A
B
I
N
E
T

S

Cabinet Features

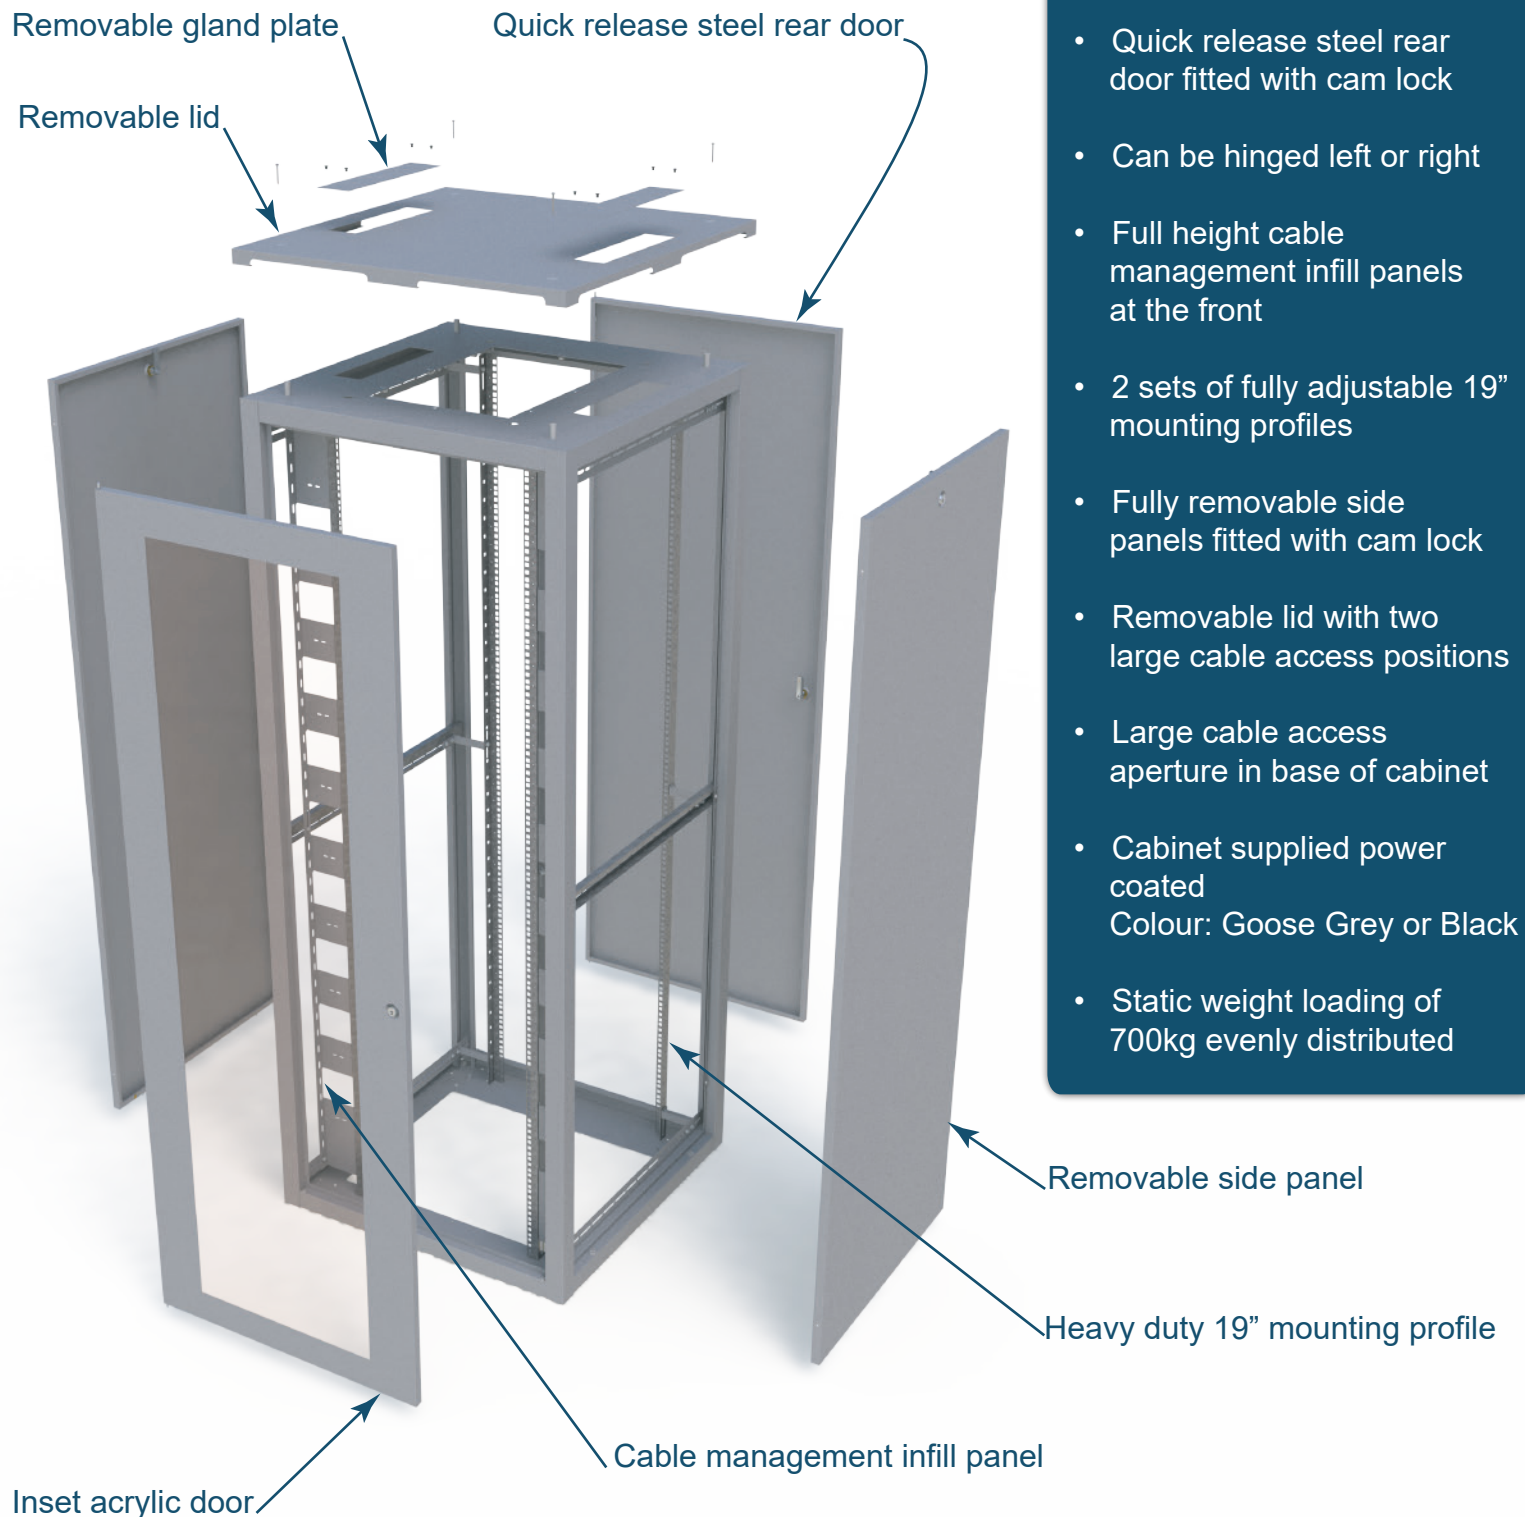

Conforms to the following standards:

IEC 60297-3
DIN 41494-7
EIA 310-D
BS 3192

Cabinet Specifications

Width: 783mm
Depth: 783mm

add 100mm to height if using plinth



47U 780 x 780
Height: 2237mm



45U 780 x 780
Height: 2148mm



42U 780 x 780
Height: 2015mm



39U 780 x 780
Height: 1881mm



36U 780 x 780
Height: 1748mm



32U 780 x 780
Height: 1570mm



27U 780 x 780
Height: 1348mm




24U 780 x 780
Height: 1214mm



21U 780 x 780
Height: 1081mm



18U 780 x 780
Height: 948mm

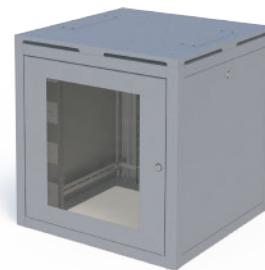

15U 780 x 780
Height: 815mm



12U 780 x 780
Height: 681mm

other sizes available upon request


Conforms to the following standards:

IEC 60297-3
DIN 41494-7
EIA 310-D
BS 3192

Accessories

Fixed shelves 600 deep

available in 2 options

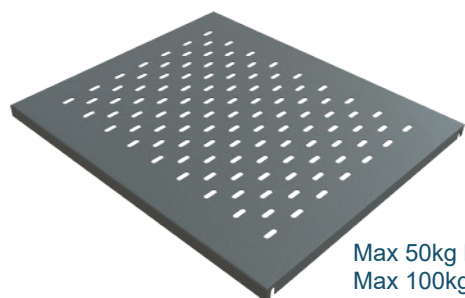

Max 50kg load
Max 100kg load

Modem shelves


available in 4 options



1U/190
1U/300
2U/300
2U/400

Plinth


780mm Wide x 780mm Depth x 100mm Tall

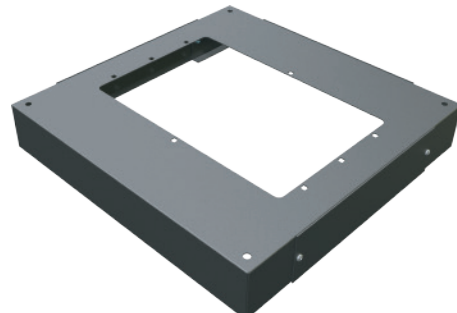

Cable tray

available in 2 widths

150mm Wide
300mm Wide

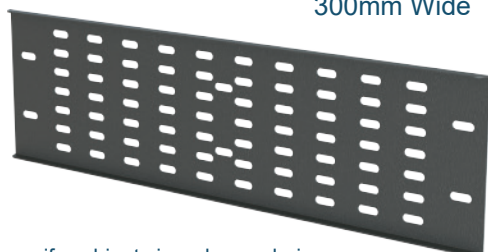

please specify cabinet size when ordering

Roof mounted fan tray

available in 2 options

2 way
4 way



19" Power Distribution Unit



Horizontally mounted PDU

19" 4 way
19" 6 way

Vertically Mounted PDU


8 way
10 way
12 way

19" 6 way shown only

Blanking panels

available in 4 options

1U
2U
3U
4U

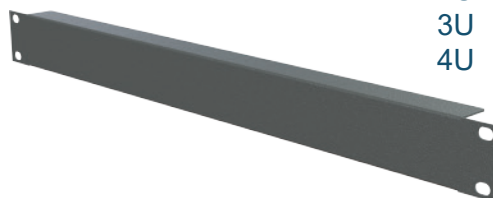

Earthing kit



Cage nut kit




Castors

Medium Duty 300kg
Heavy Duty 600kg



Adjustable foot



Conforms to the following standards:

IEC 60297-3
DIN 41494-7
EIA 310-D
BS 3192