

# C A B I N E T



# S

# Sound Reducing Cabinet Features

Supplied fully assembled on a pallet

Hinged front & rear steel doors with 3 point locking, can be hinged left or right

Fully removable steel side panels fitted with 2 camlocks

Perforated raised lid

6 way quiet fan tray fitted in top of cabinet

2 sets of fully adjustable heavy duty 19" profiles



Brushed cable access in base of cabinet

Integral plinth fitted with heavy duty castor's

Cabinet is a welded construction so cannot be dismantled

Suits all makes of servers

Cabinet should remain on castor's to create adequate gap under cabinet to allow adequate airflow

Doors, sides, lid & plinth are lined with acoustic foam to reduce noise

All aperture & joining parts have a neoprene seal fitted to reduce noise




Conforms to the following standards:

IEC 60297-3  
DIN 41494-7  
EIA 310-D  
BS 3192

# Sound Reducing Cabinet Specifications

U Spacing & size made to order

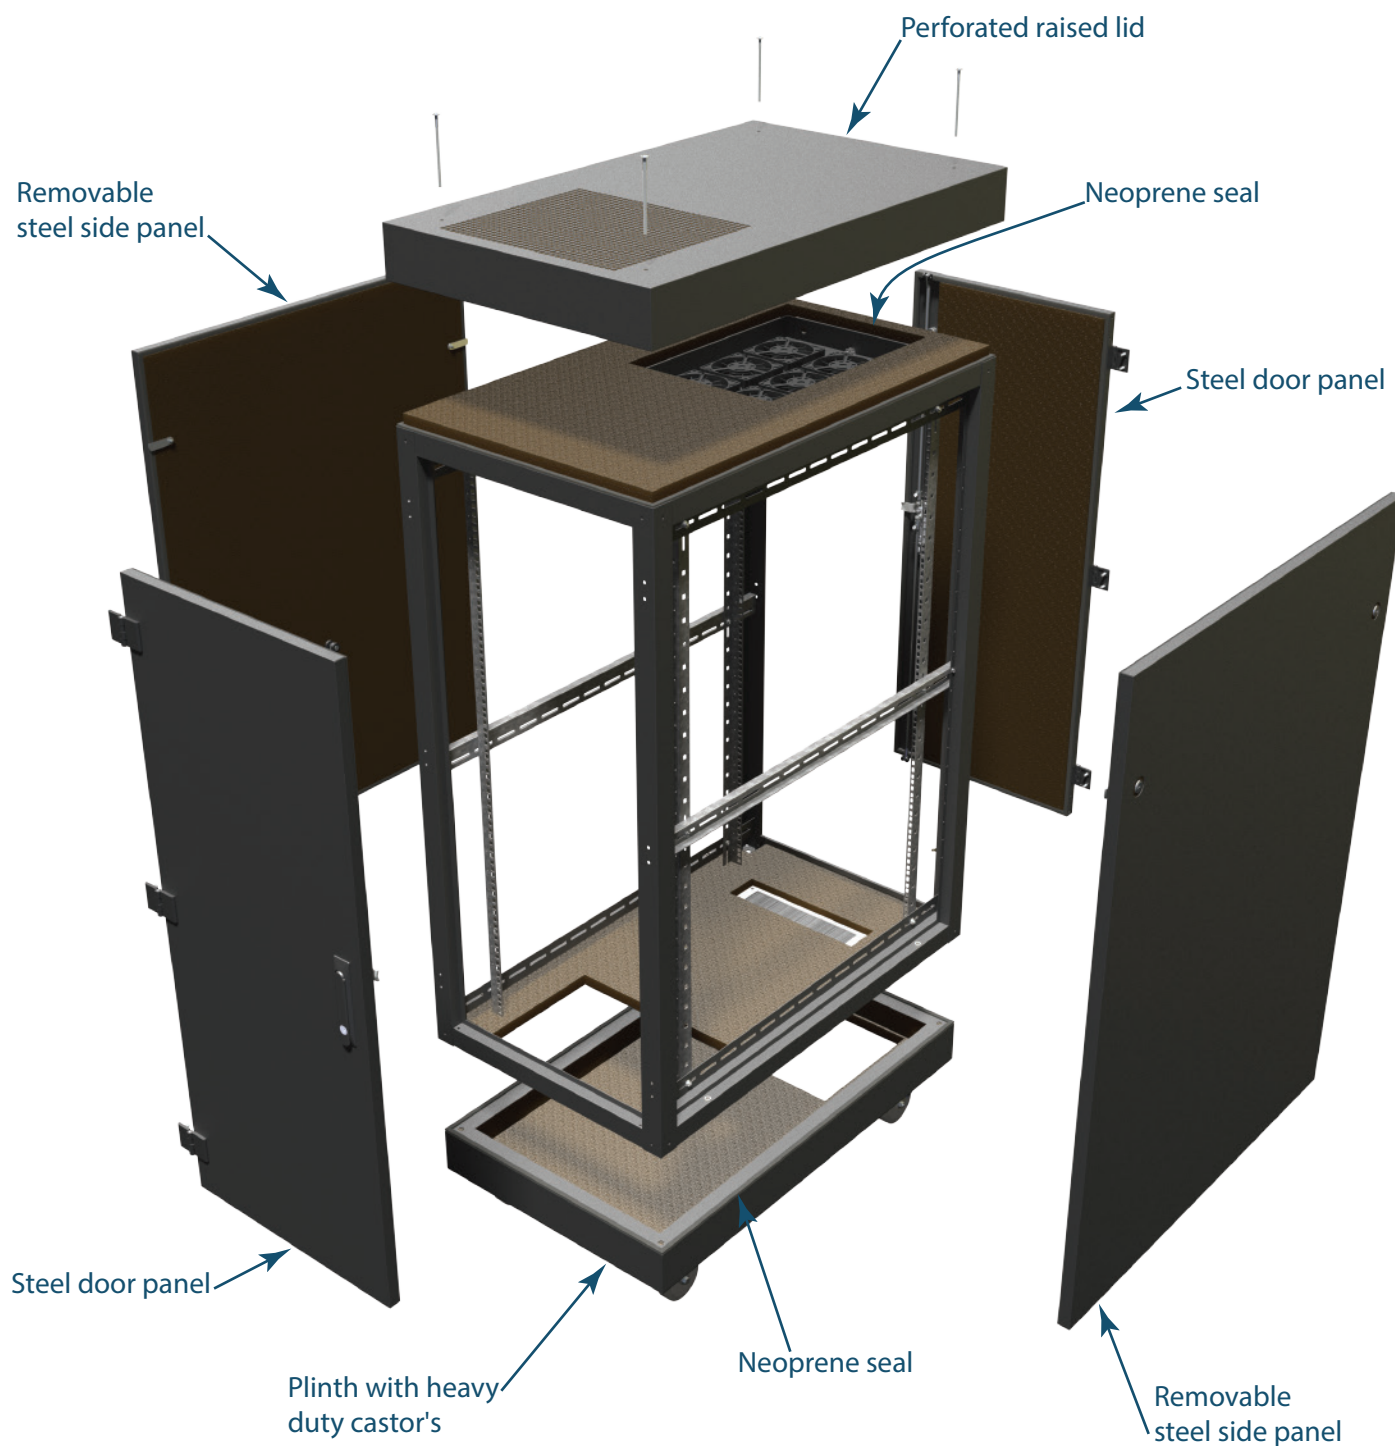


Conforms to the following standards:

IEC 60297-3  
DIN 41494-7  
EIA 310-D  
BS 3192



# Accessories

## Fixed shelves

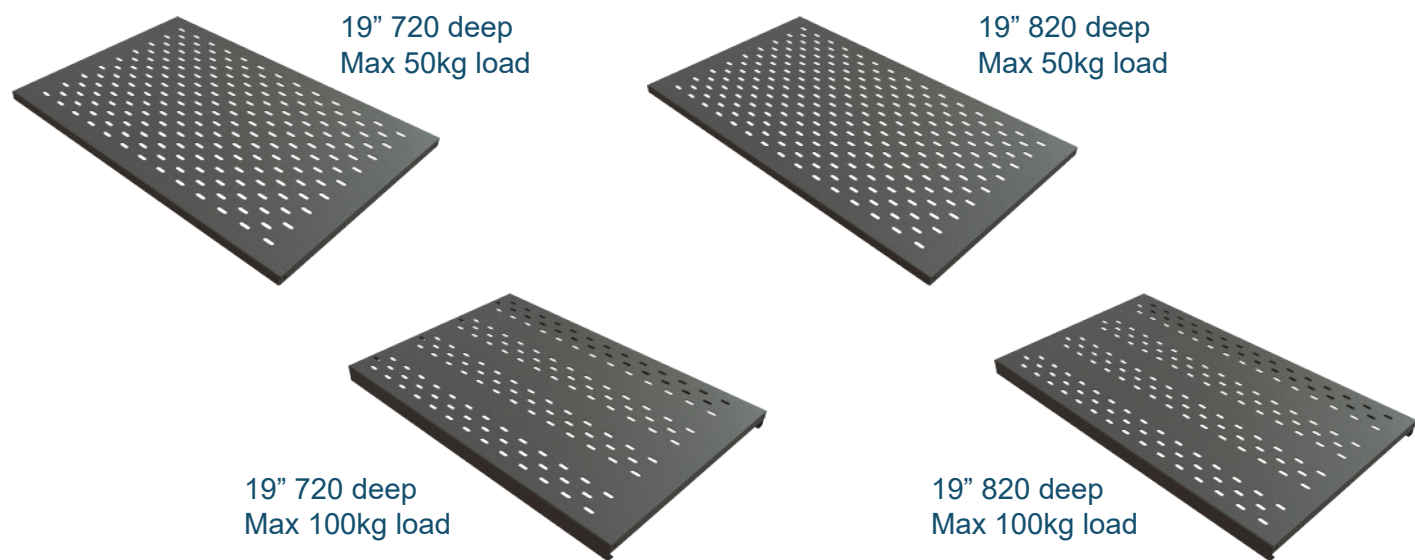

## Telescopic shelves



## Earthing kit



## Cage nut kit



## 19" Power Distribution Unit



Horizontally mounted PDU  
19" 4 way  
19" 6 way

Vertically Mounted PDU  
8 way  
10 way  
12 way

\*19" 6 way shown only\*

Conforms to the following standards:  
IEC 60297-3  
DIN 41494-7  
EIA 310-D  
BS 3192